



# DAILY

## 35C 15/17/21 V (I/P) VAN

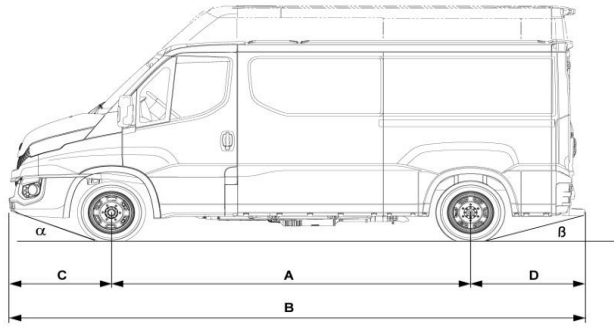

### DIMENSIONS (mm)

WHEELBASE (A)	3520		3520L		4100		4100L	
ROOF	H1	H2	H2	H3	H2	H3	H2	H3
Volume (m <sup>3</sup> )	9	10.8	12	13.4	16	18	17.5	19.6
B Overall length (including step 90mm)	5650		6050		7230		7630	
K Overall height (unladen)	2250	2610	2610	2800	2610	2800	2610	2800
E Overall width	2010							
M Front track	1740							
N Rear track	1540							
P Ground clearance min. Front (laden)	115				132			
P Ground clearance min. Front (unladen)	154				171			
C Front overhang	1008							
D Rear overhang	1120	1520		2120		2520		
Turning Circle ( K to K ) :	12084	12084		13800		13800		
Turning Circle ( Wall to wall ) :	12744	12744		14466		14466		
<b>CARGO AREA</b>								
Interior length	3130		3540		4680		5125	
Interior width	1800							
Interior Height	1545	1900	1900	2100	1900	2100	1900	2100
Dist. Between wheel arches (inter.)	1032							
Height of wheel arches	280							
Height of loading area ( / P )	663 (663)							
<b>REAR DOOR</b>								
Opening width	1540							
Opening height	1430	1780	1780	1990	1780	1990	1780	1990
<b>SIDE LOAD DOOR</b>								
Opening width	1100		1250					
Opening height	1415		1780					
<b>WEIGHTS (kg)</b>								
GVW	3500							
GTW	7000							
Front Axle plated wieght	1900							
Rear Axle plated weight	2600							
Unbraked Trailer towing capacity	750							
Braked Trailer towing capacity	3500							
Kerb Weight	2206	2230	2305	2340	2430	2470	2571	2614
Kerb weight front axle	1291	1291	1310	1310	1350	1350	1440	1411
Kerb weight rear axle	916	939	995	1030	1080	1120	1131	1202
Load capacity max. (97/27)	1294	1270	1195	1160	1070	1030	929	886

Weights are in working order EC 97/27 (tolerance + / - 5%) for the performance standard with full tank of fuel, spare wheel, tools & with the driver.

ENGINE		3.0 litre		EURO 5 (LD)	
Principle:	4-stroke, direct injection with turbo intercooler and Waste Gate (.15 WG) turbine variable (.17 VGT). Twin Stage Turbo (.21 TST) Exhaust gas treatment EGR. 16 valves, timing chain.				
Number of cylinders:	4 inline				
Bore x stroke:	95,8 x 104 mm				
Total displacement:	3000 cc				
Compliant Standards:	EEC 97/21				
Particulate Filter:	Standard				
<b>Power/Torque:</b>	kW/Hp	R/min	Nm	R/min	
<b>.15</b>	107/146	(3000-3500)	350	(1500-2600)	
<b>.17</b>	125/170	(3000-3500)	400	(1250-2600)	
<b>.21</b>	150/205	(3000-3500)	470	(1400-2600)	
<b>CLUTCH</b>					
Single dry plate hydraulically operated.					
Diameter: 11" (279,5 mm).15, .17 & 12" (305 mm).21					
<b>GEARBOX</b>					
<b>6 speed sychromesh 2840.6 OD (std .17)</b>					
1.st speed:	5,373:1				
6.th speed:	0,791:1				
Reverse:	4,838:1				
<b>6 speed sychromesh 2850.6 OD (standard .21 engine)</b>					
1.st speed:	4,655:1				
6.th speed:	0,685:1				
Reverse:	4,189:1				
<b>6 speed sychromesh 6AS400 OD</b>					
Optional automated available on .17 engine					
1.st speed:	5,373:1				
6.th speed:	0,791:1				
Reverse:	4,838:1				
<b>CONSTRUCTION &amp; FINISH</b>					
C - section steel longitudinal side members and tubular cross members (Fe420, dimensions 180x69x3), with pressed steel unitary body mounted on rubber bushes. Anti corrosion process includes full cataphoretic dipping & galvanised box sections along with zinc plated panels in all vulnerable areas. Full undersealing.					
<b>CAB INTERIOR</b>					
<b>All new interior includes:</b>					
-Greater glass area for improved visibilty					
-All new lower height high comfort drivers seat - 3 way adjustable					
-Lower, smaller and realigned adjustable steering wheel and controls					
-New high comfort dual passenger seat with 3 point seatbelts					
-All new dash board with improved storage, cup holders, instruments and ergonomics					
-New high efficiency ventilation system					
-New bluetooth Radio/CD with new 4 speaker soundsystem, plus dash mounted USB/AUX connections controlled from the steering wheel					
-Closed dash top storage					
<b>CAB EXTERIOR</b>					
-Sturdy chassis mounted front bumper and sacrificial plastic lower side panels - full length					
-Left hand side sliding door & 270 degree rear doors					
-Large exterior rear view mirrors with double size wide angle mirror					
-Full width rear step					
<b>BRAKES</b>					
Front and rear discs with ABS, Hill Holder, ESP9, EBD and ASR.					
	Front	Rear			
Ø disc (mm):	290	290			
<b>Service brake:</b>					
Hydraulic with vacuum assistance, diagonal circuit.					
Wear indicator on the front and rear.					
<b>Hand brake:</b>					
Handbrake on the rear discs.					
<b>STEERING</b>					
Rack and pinion with hydraulic assistance,					
Steering wheel Ø 420mm, steering lock					
<b>ELECTRICAL INSTALLATION</b>					
Alternator:	14V - 150 A				
Battery:	12V - 110 Ah				
<b>SUSPENSION</b>					
Front:	New Quad Leaf: twin wishbone plus parabolic transverse leaf				
Optional Front:	New Quad Tor: incorporating torsion bar with antiroll bar adds 35l				
	2 leaf parabollic with rubber bump stops plus anti roll bar				
	2 bag auto self leveling with antiroll bar &				
Rear air:	stationary raise / lower facility				
Shock absorbers:	Hydraulic telescopic reinforced front and rear				
<b>WHEELS AND TYRES</b>					
195/65 R 16 Load index 104/102					
<b>FUEL TANK</b>					
70L plastic left side.					
<b>SECURITY</b>					
-Desmodromic keys & locks, steering lock,immobiliser					
-Unglazed full steel bulkhead to Din 75410, unglazed rear doors					
<b>LOAD AREA</b>					
Floor-steel ribbed with DIN load lashing rings					
Sides internally reinforced with DIN lower load lashing rings					
Left hand side sliding door & 270 degree rear doors					
Full steel DIN 75410 bulkhead					
<b>MODEL VARIANTS</b>					
<b>DAILY PLUS specification additionally includes:</b>					
Passenger bench seat with desk plus internal storage					
Cruise control, Corning fog lamps					
Heated and electrically adjustable rear view mirrors					
<b>DAILY TOP specification further adds:</b>					
Manual air conditioning plus compressor					
Suspended driver's seat					
Comfort dash: Central card draw and cup holder,					
lower central draw, Glove compartment					
<b>OPTION PACKS</b>					
<b>-Special van pack:</b>					
Front and rear mudflaps, sensors in rear					
step & 3rd stop light with rear spot light					
<b>-Towing pack:</b>					
13 pin elctrical towing socket,					
50mm ball tow bar and Tachograph					
<b>-Winter pack:</b>					
Heated windscreen					
Heated and elctric mirrors					
Heated induction system					